


Alphacool article number: 25049

Aquatuning article number: 1019895

The Alphacool front I/O panel for Alphacool server cases in the 1 to 4U format offers two USB 2.0 ports in addition to the power and reset switch. The board also offers various status LEDs to keep a constant eye on the functions of the server rack. These include of course one status LED for the hard disk and power and three status LEDs for network connection.

## Alphacool Front I/O-Panel

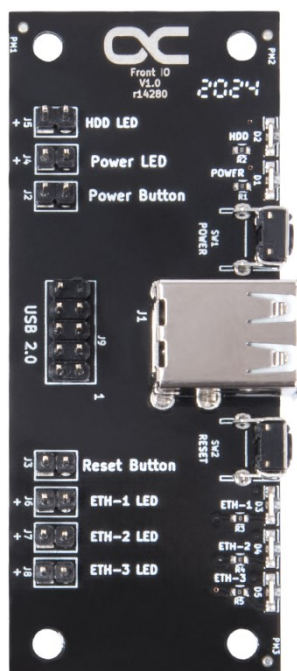

- 2 x USB 2.0 Connector
- 3 x Ethernet activity LED's
- Power LED
- HDD LED
- Power button
- Reset button

## Scope of delivery

1 x Alphacool Front I/O-Panel with USB 2.0 for Servercases 1U, 2U and 4U

## Data

L x W x H	34,5 x 83 x 20 mm
Net weight	18 g
Connectors	HDD LED Power LED 3 x Ethernet LED Power button Reset button USB 2.0
LED's	Power LED HDD LED 3 x Ethernet LED
USB Connectors	2 x USB 2.0

## Download Links

Product pics	<a href="https://www.alphacool.com/download/1019895_Front_IO_Panel_pics.zip">https://www.alphacool.com/download/1019895_Front_IO_Panel_pics.zip</a>
--------------	-----------------------------------------------------------------------------------------------------------------------------------------------------

## Packaging dimensions 1 unit

L x W x H	
Total weight	21 g

## Other data

Certification	CE, FC, RoHS
EAN	4250197250498
Customs number	85043180900

## Article text

The Alphacool front I/O panel for Alphacool server cases in the 1 to 4U format offers two USB 2.0 ports in addition to the power and reset switch. The board also offers various status LEDs to keep a constant eye on the functions of the server rack. These include of course one status LED for the hard disk and power and three status LEDs for network connection.

On the board there are 2-pin connectors for all LEDs and the power and reset switch. Three connectors for the network LEDs, one connector each for the power and reset switch and of course one connector each for the HDD and power LEDs.

The board is fixed with 4 screws. The mounting holes have an inner diameter of 3.5 mm. The distances between the mounting holes, measured from the center point, are 74 mm x 24 mm.

We assume no responsibility for any typing errors.

Alphacool International GmbH, Marienberger Strasse 1, 38122 Braunschweig Tel: (+49)0531 288 740 Supportmail: [info@alphacool.com](mailto:info@alphacool.com)